

Getting Started Guide

BlackBerry 8700g Wireless Handheld™



How do I navigate?

Roll the trackwheel to move the cursor and highlight items on the screen.

Click (press) the trackwheel to open the menu or select items.

Press the Escape button to exit a screen, cancel an action, or go back one page in the browser.








Set Convenience keys

In the device options, click **Screen/Keyboard**. Set the device program that opens when you press the assigned Convenience key.









Shortcuts

Phone

| | |
|---|---|
| Open the phone screen or make a phone call | Press  |
| End a call | Press  |
| Turn mute on or off during a call | Press the Mute button |
| Turn speakerphone on or off during a call | Press  |
| Change the volume during a call | Roll the trackwheel |
| Dial a letter in a phone number | Hold  + Press the letter |
| Open the contact list from the phone screen | Hold  |
| Redial a number | Press  twice |
| Call a voice mail access number | Hold  |
| Assign speed dial to a number key | Hold an unassigned letter key > Click Yes |

Browser






| | |
|--|---|
| Go back one page | Press the Escape button |
| Exit the browser | Hold the Escape button |
| Search for a word on a page | Press  |
| Open a selected link | Press  |
| Switch between normal and full screen view | Press  |
| Go down one page | Press  |
| Go up one page | Press  +  |
| Go to a specific web page | Press  |

Message list

| | |
|--------------------------------------|---|
| Open a selected message | Press  |
| Compose a new message | Press  |
| Reply to sender | Press  |
| Reply to all | Press  |
| Forward a message | Press  |
| Go to messages from the next day | Press  |
| Go to messages from the previous day | Press  |
| Go to the next unread message | Press  |
| File a message | Press  |
| View sent messages | Press  +  |
| View received messages | Press  +  |

Calendar

For these shortcuts to work in Day view, in the calendar options, set the **Enable Quick Entry** field to **No**.

| | |
|---|--|
| Go to the next day, week, or month | Press  |
| Go to the previous day, week, or month | Press  |
| Schedule an appointment | Press  |
| Move the cursor horizontally in week view | Hold  + Roll the trackwheel |
| Move the cursor vertically in month view | Hold  + Roll the trackwheel |

Navigating screens




- Lock the device/keyboard** Click **Lock**. Set a password for added security.
- Unlock the device/keyboard** Double-click the trackwheel
- Move the cursor vertically/horizontally** Roll the trackwheel/
Hold **ALT** + Roll the trackwheel
- Return to the previous screen** Press the **Escape** button
- Return to the Home screen** Press
- Click an item** Highlight the item > Click the trackwheel
- Select multiple items** Hold + Roll the trackwheel
- Switch between programs** Hold + Press the **Escape** button
- Go to the top of a screen** Press
- Go to the bottom of a screen** Press
- Turn on or off the device** Hold the **Power** button

Typing and editing




- Capitalize a letter** Hold the letter
- Insert a period** Press twice
- Type the alternate character on a key** Press + the key
- Insert a symbol** Press
- Insert an accented character** Hold a letter + Roll the trackwheel
- Select lines of text** Press > Roll the trackwheel
- Select individual characters** Hold + Roll the trackwheel
- Copy selected text** Press + Click the trackwheel or Click the trackwheel > Click **Copy**
- Cut selected text** Press + or Click the trackwheel > Click **Cut**
- Paste selected text** Press + Click the trackwheel or Click the trackwheel > Click **Paste**
- Cancel selection** Press the **Escape** button

Fields



- Press to change the value in a field.
- Press to view all the values that are available in the selected field.
- On an options screen, you can also select an option and click the trackwheel. Click **Change Option**. Click a value.

Menus



- Click the trackwheel to view the menu.
- On the menu, click standard menu items such as **New**, **View**, **Edit**, **Delete**, **Save**, **Options**, and **Help**. Additional menu items might appear depending on the item you have selected.

Programs

Explore the many useful programs that your BlackBerry® device has to offer. Here are a few to get you started.



Click **Messages** to view the messages list, compose new messages, and set options for email messages.



Click **Browser** to visit web pages, browse for programs and ring tones, and set browser options. Your device might have more than one browser.



Click **Profiles** to set and edit ring tone profiles or to manage downloaded ring tones.



Click **Options** to find the main list of device options including Bluetooth® options, password settings, and more!



Additional programs appear on the Home screen, including the task list, memos list, calculator, alarm, pictures list, help, and more!

Status indicators

| | | | |
|----------------------|--------------------|-----------------------------|--------------------------|
| roaming | Number mode on | sent message | unread SMS message |
| Home zone | Shift mode on | message sending | unread MMS message |
| receiving data | Alt mode on | message not sent | system busy |
| transmitting data | voice mail message | read message | notification LED |
| Bluetooth radio on | placed call | unread message | low battery LED |
| Bluetooth connection | missed call | filed message | wireless coverage LED |
| alarm set | received call | message includes attachment | Bluetooth connection LED |

Full battery power



Low battery power



Charging



Wireless network coverage

You must connect to the wireless network to begin using many device features. To connect to or disconnect from the wireless network, click **Turn Wireless On/Turn Wireless Off**.

Indicators on the Home screen show the wireless coverage level for the area in which you are using your device. A low level of wireless coverage might limit the use of some device features, as shown in the chart below.

| | | EDGE | GPRS | edge | GPRS | GSM |
|------------------------|--|------|------|------|------|-----|
| Full wireless coverage | | ● | ● | ● | ● | ● |
| No wireless coverage | | ● | ● | ● | ● | ● |
| Wireless is turned off | | ● | ● | | | |
| Emergency calls only | | ● | | | | |
| | | ● | | | | |
| | | ● | | | | |
| | | ● | | | | |
| | | ● | | | | |
| | | ● | | | | |
| | | ● | | | | |
| | | ● | | | | |

*Multimedia Message Service (MMS) and EDGE high-speed data are subject to availability. Contact your service provider for more information.

Contents

| | | | |
|--|----|--|----|
| Welcome to BlackBerry! | 3 | Send email messages | 15 |
| Setting up your device | 5 | Send PIN messages | 15 |
| Insert the SIM card | 5 | Send SMS (text) messages | 15 |
| Insert the battery | 5 | Send MMS (multimedia) messages | 15 |
| Charge the battery | 6 | Add contacts | 16 |
| Connect to the wireless network | 6 | Add SIM card contacts to your address book | 16 |
| Choosing your email setup option | 7 | Go to web pages | 16 |
| BlackBerry Internet Email option | 7 | Set a device password | 16 |
| BlackBerry Enterprise Server option | 7 | Lock the device | 16 |
| BlackBerry Desktop Redirector option | 7 | Set the date and time | 17 |
| Setting up for email using the BlackBerry Internet Email | 9 | Enable profiles | 17 |
| Set up for email using the device | 9 | Turn on the Bluetooth radio | 17 |
| Set up for email using a computer | 9 | Pair with another Bluetooth-enabled device | 17 |
| About adding an email address | 10 | Find more information | 17 |
| Log in using the device | 10 | Frequently asked questions | 19 |
| Log in using a computer | 10 | BlackBerry Internet Email - frequently asked questions | 21 |
| Find more information | 10 | | |
| Install the BlackBerry Desktop Software | 10 | | |
| Setting up for email using the BlackBerry Enterprise Server | 13 | | |
| Set up for email using the device | 13 | | |
| Set up for email using a computer | 13 | | |
| How do I... | 15 | | |
| Make phone calls | 15 | | |

Welcome to BlackBerry!

Whether you plan to use your BlackBerry® device for business or personal productivity, you have made an excellent choice! With powerful push-messaging, voice, web, and organizer features, BlackBerry is the all-in-one solution that is designed to keep you connected to the people, data, and resources that you need every day.

To begin using your BlackBerry device, you must set up and turn on the device, connect to the wireless network, and set up for email. You can also choose to install the BlackBerry Desktop Software so that you can connect your device to a computer for data synchronization and charging.

Take a moment to read this guide and any documents provided by your wireless service provider. These resources provide important setup information and are designed to help you get the most from your BlackBerry device.


Setting up your device

Insert the SIM card


Your SIM card contains important information about your wireless service. Your SIM card might be inserted already.

Warning: Turn off your device before you insert or remove the SIM card. Do not scratch, bend, or expose the SIM card to static electricity or wet conditions.

1. Press the battery cover release button.

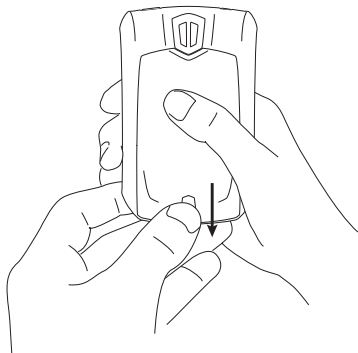

2. Slide off the battery cover.
3. If the battery is inserted, remove it.
4. Hold the SIM card with the metal contacts facing down so that the notches on the card align with the notches in the SIM card holder on your device.



5. Slide the SIM card into the holder so that it lies flat below the metal guide.
6. Continue to slide the SIM card into the holder until it stops. One end of the SIM card should be slightly hidden below the plastic casing on your device.




Note: To remove the SIM card, press gently on the top of the SIM card and slide it out of the holder.

Insert the battery

Warning: Use only the battery that Research In Motion® specifies for use with your device. See the *Safety and Product Information Booklet* for more information about using the battery safely.


1. Press the battery cover release button.
2. Slide off the battery cover.
3. Insert the battery so that the connectors on the battery align with the connectors on your device.





4. Replace the battery cover.
5. If the battery is charged, your device turns on and the confirm date and time dialog box appears.
 - If the date and time are incorrect, click **Edit**. See "Set the date and time" on page 17 for more information.
 - If the date and time are correct, click **OK**.

Charge the battery

1. Connect the small end of the USB cable to your device.



2. Depending on the type of travel charger that you received with your device, you might need to slide the plug blade attachment into the power adapter or pull the plug blades down.



3. Plug the power adapter into a power outlet.

4. Charge the battery to full power.

Note: If you install the BlackBerry Desktop Software on a computer, you can charge your device by connecting it to that computer. See "Can I charge my device by connecting it to my computer?" on page 19 for more information.

Connect to the wireless network

On the device, if the power is off, press the **Power** button. Your device should connect to the wireless network automatically.

To connect to the wireless network successfully, your wireless service must be active, and you must be in a wireless network coverage area. See the wireless network coverage chart on the inside front cover of this guide for more information.

When your device is not connected to the wireless network, you can continue to use features that do not require a connection to the wireless network. For example, you can type and save draft email messages, manage tasks, or use the calculator.

Choosing your email setup option

To begin sending and receiving email messages on your BlackBerry device, you must associate your device with an email address using one of the following options.

BlackBerry Internet Email option

Use this option to create a new BlackBerry email address for your device or to associate your device with one or more existing supported email addresses. This option is the most common email setup option for individual users. See "Setting up for email using the BlackBerry Internet Email" on page 9 for more information.

BlackBerry Enterprise Server option

Use this option if you have access to a BlackBerry Enterprise Server® and you want to associate your device with a corporate Microsoft® Outlook®, IBM® Lotus Notes®, or Novell® GroupWise® email account. See "Setting up for email using the BlackBerry Enterprise Server" on page 13 for more information.

BlackBerry Desktop Redirector option

Use this option if you do not have access to a BlackBerry Enterprise Server and you want to associate your device with a corporate Microsoft Outlook (Workgroup Installation) email account that resides on a Microsoft Exchange Server 5.5 or later. See "How do I install the BlackBerry Desktop Redirector?" on page 19 for more information

Setting up for email using the BlackBerry Internet Email

The first time that you log in to the BlackBerry Internet Email web site, you can add a supported email address, create a BlackBerry email address, or do both.

- Add an email address if you have an existing, supported email account that you want to access from your BlackBerry device.
- Create a BlackBerry email address if you do not have another existing, supported email account, or if you need an additional email address that you can use to send and receive email messages.

Set up for email using the device

1. Verify that your BlackBerry device is connected to the wireless network.
2. Click **Setup Internet E-mail**.
3. Read the legal terms and conditions carefully. Perform one of the following actions:
 - To decline the legal terms and conditions and stop the setup process, click **No**. Click **Get Link**.
 - To accept the legal terms and conditions and continue the setup process, click **Yes**. Click **Get Link**.
4. Perform one of the following actions:
 - To add an email address for an existing supported email account, type the full email address (for example, `yourname@ispname.com`). Type the password for your email account.
 - To create a BlackBerry email address, click **Create a BlackBerry email address**. In the **Username** field, type the name that

you want to appear before the at sign (@) in your new BlackBerry email address.

5. Click **Next**.

6. Click **OK**.

Set up for email using a computer

To use this setup option, you require the following items:

- **Internet browser:** Microsoft® Internet Explorer version 6.0 (or later) or Netscape® Communicator version 7.2 (or later) with JavaScript™ enabled
 - **Operating system:** Microsoft Windows® 2000, Windows XP or Mac OS® 10.3 (or later)
1. Verify that the computer is connected to the Internet.
 2. Log in to My T-Mobile.
 3. On the My T-Mobile home page, click **Set Up BlackBerry Internet E-mail**.
 4. Read the legal terms and conditions carefully. Perform one of the following actions:
 - To decline the legal terms and conditions and stop the setup process, click **No**.
 - To accept the legal terms and conditions and continue the setup process, click **Yes**.
 5. Perform one of the following actions:
 - To add an email address for an existing supported email account, type the full email address (for example, `yourname@ispname.com`). Type the password for your email account.
 - To create a BlackBerry email address, in the **Username** field, type the name that

you want to appear before the at sign (@) in your new BlackBerry email address.

6. Click **Next**.
7. Click **OK**.

About adding an email address

You can add email addresses that are associated with the following email account types to the BlackBerry Internet Email:

- ISP (using POP or IMAP)
- Microsoft Exchange (using Microsoft Outlook Web Access or the BlackBerry Mail Connector)
- IBM Lotus Domino (using the mail connector)

Depending on your email provider, you might not be able to add email addresses for certain email account types. Contact your email provider for more information.

Note: You might be prompted to install the BlackBerry Mail Connector on your computer when you add a supported work email address. The BlackBerry Mail Connector is designed to enable the BlackBerry Internet Email to retrieve email messages from a Microsoft Outlook or IBM Lotus Notes work email account from behind a company's firewall.

Log in using the device

You must log in to the BlackBerry Internet Email web site to add or remove email addresses and to manage settings and message delivery options.

1. Verify that your BlackBerry device is connected to the wireless network.
2. Click **Setup Internet E-mail**.

3. Change the settings or message delivery option.

Note: To follow a link in the browser, click the link. Click **Get Link**.

Log in using a computer

You must log in to the BlackBerry Internet Email web site to add or remove email addresses and to manage settings and message delivery options.

1. Verify that the computer is connected to the Internet.
2. Log in to **My T-Mobile**.
3. On the My T-Mobile home page, click **Set Up BlackBerry Internet E-mail**.

Find more information

See the *BlackBerry Internet Service Online Help* for more information about adding email addresses, creating a BlackBerry email address, or managing email settings and message delivery options.

- On your BlackBerry device, on the BlackBerry Internet Email web site, click **Help**. Click **Help (Get Link)**.
- In a web browser on a computer, on the BlackBerry Internet Email web site, click **Help**.

Install the BlackBerry Desktop Software

Install the BlackBerry Desktop Software on a computer to perform any of the following actions:

- synchronize personal information management (PIM) data such as contacts, tasks, and appointments
- back up and restore device data

- load new device programs such as updated system software, games, and third-party personal information management programs
- charge your device using the computer

To install the desktop software, you require the following items:

- Intel®-compatible 486 or higher computer that is compliant with USB 1.1 or later
 - Windows 98, Windows ME, Windows 2000, or Windows XP
 - available USB port
 - If you use Windows 98 (not Windows 98 Second Edition), you must download the DCOM 98 version 1.3 update from www.microsoft.com/com/default.msp for the USB driver to operate as expected.
1. Insert the BlackBerry Desktop Software Installation CD into your CD drive.
 2. Complete the on-screen instructions.
 - Select **BlackBerry Internet Service** as your account integration option.
 3. When the installation is complete, connect the smaller end of the USB cable to your device.
 4. Connect the larger end of the USB cable to an available USB port on the computer.
 5. On the computer, on the taskbar, click **Start**.
 6. Click **Programs > BlackBerry > Desktop Manager**.

Note: To find more information about the BlackBerry Desktop Software features, click **Help > Desktop Help Contents**.

Setting up for email using the BlackBerry Enterprise Server

Your system administrator might set up your device for email on your behalf, or you might need to associate your BlackBerry device with a supported email address yourself using one of the methods described here.

Set up for email using the device

If your system administrator has provided you with an enterprise activation password, you can set up for email using the device.

1. Verify that your device is connected to the wireless network.
2. On your device, click **Enterprise Activation**.
3. Type your supported corporate email account address.
4. Type the enterprise activation password provided by your system administrator.
5. Click **Activate**.

Note: Your system administrator might request that you install the BlackBerry Device Manager program on your computer to reduce the amount of data that is sent over the wireless network when your device is connected to your computer.

Set up for email using a computer

If your system administrator has not provided you with an enterprise activation password, but has confirmed that you are permitted to use the BlackBerry Enterprise Server, you can install the BlackBerry Desktop Software on your computer to set up for email.

To install the desktop software, you require the following items:

- Intel-compatible 486 or higher computer that is compliant with USB 1.1 or later

- Windows 98, Windows ME, Windows 2000, or Windows XP
 - Available USB port
 - If you use Windows 98 (not Windows 98 Second Edition), you must download the DCOM 98 version 1.3 update from www.microsoft.com/com/default.msp for the USB driver to operate as expected.
1. Insert the BlackBerry Desktop Software Installation CD into your CD drive.
 2. Complete the on-screen instructions.
 - Select **BlackBerry Enterprise Server** or **BlackBerry Desktop Redirector** as your account integration option.
 - Select **BlackBerry Enterprise Server** as your email redirection option.
 3. When the installation is complete, connect the smaller end of the USB cable to your device.
 4. Connect the larger end of the USB cable to an available USB port on your computer.
 5. On your computer, on the Windows taskbar, click **Start**.
 6. Click **Programs > BlackBerry > Desktop Manager**.
 - When you are prompted to generate an encryption key, complete the on-screen instructions.

Note: To find out more information about the features of the BlackBerry Desktop Software, click **Help > Desktop Help Contents**.

How do I...

Make phone calls

On the Home screen, type a phone number. Press the **Send** key. To end the call, press the **End** key.

Notes: Press the **Send** key on any screen to open the phone.

Select a contact, call log, or phone number link on any screen and press the **Send** key to make a call.

To switch between the speaker and earpiece during a call, press the **Speaker** key.

Send email messages

You must associate your device with an email address before you can send and receive email messages. See "Choosing your email setup option" on page 7 for more information.

1. In a messages list, click the trackwheel.
2. Click **Compose Email**.
3. In the **To** field, type an email address or a contact name.
4. Type a message.
5. Click the trackwheel.
6. Click **Send**.

Note: If your device is associated with more than one email address, you can select an address to send the message from. At the top of the message, in the **Send Using** field, press the **Space** key until the preferred email address appears.

Send PIN messages

A personal identification number (PIN) uniquely identifies each BlackBerry device on the network. If you know the PIN of another BlackBerry device user, you can send a PIN message to that person. To find your PIN, in the device options, click **Status**.

1. In a messages list, click the trackwheel.
2. Click **Compose PIN**.
3. In the **To** field, type a PIN or a contact name.
4. Type a message.
5. Click the trackwheel.
6. Click **Send**.

Send SMS (text) messages

1. In a messages list, click the trackwheel.
2. Click **Compose SMS**.
3. Click **[Use Once]**.
4. Click **SMS**.
5. Type an SMS-compatible phone number.
6. Click the trackwheel.
7. Click **Continue**.
8. Type a message.
9. Click the trackwheel.
10. Click **Send**.

Note: If you have added contacts to the address book, you can select a contact from the list after you click **Compose SMS**.

Send MMS (multimedia) messages

1. In a messages list, click the trackwheel.
2. Click **Compose MMS**.
3. Click **[Use Once]**.
4. Click **MMS**.
5. Select a send method for your MMS message.
6. Type an MMS-compatible phone number or an email address.

7. Click the trackwheel.
8. Click **Continue**.
9. Type a message.
10. Click the trackwheel.
11. Click **Attach Address, Attach Appointment, Attach Audio, or Attach Picture**.
12. Click a contact, appointment, audio file, or image.
 - If you selected a contact, click **Continue**.
 - If you selected an appointment, click **Attach Appointment**.
13. Click **Continue**.
14. Click the trackwheel.
15. Click **Send**.

Note: If you have added contacts to the address book, you can select a contact from the list after you click Compose MMS.

Add contacts

1. In the address book, click the trackwheel.
2. Click **New Address**.
3. Type the contact information.
4. Click the trackwheel.
5. Click **Save**.

Add SIM card contacts to your address book

If you have saved contact information on your SIM card, you can copy that information into the address book on your device.

1. In the address book, click the trackwheel.
2. Click **SIM Phone Book**.
3. Click the trackwheel.
4. Click **Copy All To Address Book**.

Go to web pages

1. In the browser, click the trackwheel.
2. Click **Go To**.
3. Type a web address.
4. Click the trackwheel.
5. Click **OK**.

Notes: To insert a period, press the **Space** key.

To insert a slash mark (/), press the **Shift** key + the **Space** key.

The **Go To** dialog box tracks the web addresses that you type. To go to a web page on the list, click the web address. Click **OK**.

Set a device password

1. In the device options, click **Security Options**.
2. Click **General Settings**.
3. Set the **Password** field to **Enabled**.
4. Set the other security options.
5. Click the trackwheel.
6. Click **Save**.
7. Type a device password.
8. Click the trackwheel.
9. Retype the device password.
10. Click the trackwheel.

Lock the device

With a device password set, on the Home screen, click **Lock**.

To unlock your device, on the Lock screen, roll the trackwheel. Click **Unlock**. Type your password. Press the **Enter** key.

Note: When the device is locked, you should be able to make an emergency call without dialing the emergency access number. Click **Emergency Call**. Click **Yes**.

Set the date and time

1. In the device options, click **Date/Time**.
2. Set the **Time Zone** field.
3. In the **Date/Time Source** field, set a date and time source.
4. Click the trackwheel.
5. Click **Update Time**.
6. Click the trackwheel.
7. Click **Save**.

Note: To set the date and time yourself, set the **Date/Time Source** field to **Off**. Set the other fields on the Date/Time screen to display the correct date and time. Save your changes.

Enable profiles

In the profiles list, click a notification profile. Click **Enable**.

Note: To change the current notification profile quickly, select a profile. Press the **Space** key.

Turn on the Bluetooth radio

To turn on the Bluetooth® radio, in the device options, click **Bluetooth**. Click the trackwheel. Click **Enable Bluetooth**.

To turn off the Bluetooth radio, in the device options, click **Bluetooth**. Click the trackwheel. Click **Disable Bluetooth**.

Pair with another Bluetooth-enabled device

1. In the device options, click **Bluetooth**.
2. Click the trackwheel.
3. Click **Add Device**.
4. Click the name of a Bluetooth-enabled device.

5. In the **Enter passkey for <device name>** field, type a passkey.
6. Type the same passkey on the Bluetooth-enabled device to which you are pairing.

Notes: Verify that the Bluetooth-enabled device that you want to pair with is in the correct mode for pairing.

The names of Bluetooth-enabled devices with which you have already paired appear in the list of paired Bluetooth-enabled devices. They do not appear in the list of Bluetooth-enabled devices that appears when you click **Add Device**.

Find more information

To open help topics for a program that you are using, in the program, click the trackwheel. Click **Help**.

To open the main list of help topics for all programs, on any help screen, click the trackwheel. Click **Index**.

Frequently asked questions

Why does my device not turn on?

The power might be off. Press the **Power** button.

The battery might not be charged. See "Charge the battery" on page 6 for more information.

Why does my device not charge?

A connection might not be complete. Check that all cables and plugs are fully inserted into ports and power outlets. See "Charge the battery" on page 6 for more information.

The battery might not be inserted properly. Turn off your device and then remove and reinsert the battery. Verify that the connectors on the battery align with the connectors on your device. See "Insert the battery" on page 5 for more information.

If you connect your device to the computer to charge, verify that the computer is turned on. If you connect your device to the computer using a USB hub, the hub must be self powered to provide enough power to charge your device.

Can I charge my device by connecting it to my computer?

If you have installed the BlackBerry Desktop Software or the BlackBerry Device Manager on your computer, you can connect your device to the computer to charge the battery.

1. Verify that the computer is turned on.
2. Connect the smaller end of the USB cable to your device.
3. Connect the larger end of the USB cable to an available USB port on your computer.

Note: To find more help with connecting your device to the computer, in the desktop software, click **Help** to view the *BlackBerry Desktop Software Online Help*.

Why can I not send or receive email messages?

Verify that your device is connected to the wireless network. See "Connect to the wireless network" on page 6 for more information.

Verify that you have associated your device with a supported email address. See "Choosing your email setup option" on page 7 for more information.

If you are using BlackBerry Internet Email, see the *BlackBerry Internet Service Online Help* for more information about email message troubleshooting. See "Find more information" on page 10 for more information.

If you continue to be unable to send and receive messages, reset your device by removing and reinserting the battery.

Note: To find more information about sending and receiving email messages, in a messages list, click the trackwheel. Click **Help > Email Messages**.

How do I install the BlackBerry Desktop Redirector?

If you use a Microsoft Outlook (Workgroup installation) email account that resides on a Microsoft Exchange Server version 5.5 or later and your device does not have access to a BlackBerry Enterprise Server, you might choose to install the BlackBerry Desktop Redirector software on your computer to associate your device with the email address.

To install the BlackBerry Desktop Redirector, when you install the BlackBerry Desktop Software, select **BlackBerry Desktop Redirector** as your message redirection option. See "Set up for email using a computer" on page 13 for more information about installing the BlackBerry Desktop Software.

Your computer must be on and the BlackBerry Desktop Redirector must be running to send and receive messages on your device.

How do I clean the screen?

Clean the screen and device using only a soft dry cloth. Do not use liquid, aerosol cleaners, or solvents on or near your device. Disconnect any cables from your computer and unplug any charging accessories from the electrical outlet before cleaning.

Note: See the *Safety and Product Information Booklet* for more information about caring for your device.

Where can I buy accessories for my device?

You can buy approved accessories for your device online at:

www.shopblackberry.com

Note: Use only those accessories approved by Research In Motion (RIM) for use with your particular device model. Using any accessories not approved by RIM for use with your particular device model might invalidate any approval or warranty applicable to the device and might be dangerous.

Where can I download games and ring tones for my device?

Many third-party vendors offer games, ring tones, and other programs for your device online. You can download new programs using your device browser, or download them using your computer and load them onto your device using the BlackBerry Application Loader tool of the BlackBerry Desktop Software.

For example, you can visit the following web site using the browser on your device:

mobile.blackberry.com

Note: Your use of third-party software shall be governed by and subject to you agreeing to the terms of separate software licenses, if any, for those products or services. Any third-party products or services that are provided with RIM products and services are provided "as is". RIM makes no representation, warranty, or guarantee whatsoever in relation to the third-party products or services and RIM assumes no liability whatsoever in relation to the third-party products and services even if RIM has been advised of the possibility of such damages or can anticipate such damages.

Why does the screen on my device turn off?

When you do not use your device for a period of time, the screen turns off to conserve battery power. Roll the trackwheel or press any key to turn the screen on again.

Why do some programs not appear on the Home screen?

Verify that your device is connected to the wireless network. Some programs, such as browser programs, might not appear on your device until it has successfully connected to the wireless network. See "Connect to the wireless network" on page 6 for more information.

If your device uses a theme, the program might appear in a folder or program menu instead of on the Home screen. The program might also use a different name.

BlackBerry Internet Email - frequently asked questions

How do I change or update the device I want to use with the BlackBerry Internet Email?

The BlackBerry Internet Email is linked to your particular device. If you switch devices, you can log in to the BlackBerry Internet Email web site to update the device PIN that is associated with the BlackBerry Internet Email. See "Log in using a computer" on page 10 for more information. See the *BlackBerry Internet Service Online Help* or contact T-Mobile for more information about changing or updating your device.

Why can I not add a supported email address?

Verify that the email account that is associated with the email address that you want to add supports POP3 or IMAP4. Contact your email provider for more information about the address types that you can add. See the *BlackBerry Internet Service Online Help* for more information about adding supported email addresses.

When I add a supported email address, how does it work with the BlackBerry Internet Email?

When you add a supported email address to the BlackBerry Internet Email, a link is established between the BlackBerry Internet Email and the email account that is associated with the email address you have added. This link enables you to send and receive email messages from your BlackBerry device using the email address that you have added. Email messages continue to be delivered to the original email account as they were before you added the email address to the BlackBerry Internet Email. You also see email messages from the address that you have added in the message list on your BlackBerry device. Email messages that you read, file, or delete on your BlackBerry device should be marked as read, filed, or deleted automatically in your email account. Changes that you make to email messages in your

email account are not reflected on your BlackBerry device. If you have a Microsoft Exchange or IBM Lotus Domino work email account, or an IMAP personal email account, email messages that you send from the BlackBerry device are copied to the Sent Items folder in your email account. Likewise, email messages that you delete are copied to the Deleted Items folder.

Note: Depending on your email account type or mail implementation, wireless email reconciliation might not be available for your BlackBerry device.

To synchronize personal information management (PIM) data such as contacts, tasks, and appointments, you must install the BlackBerry Desktop Software. See "Install the BlackBerry Desktop Software" on page 10 for more information.

For additional BlackBerry help and troubleshooting information:
www.blackberry.com/support

© 2006 Research In Motion Limited. All Rights Reserved. The BlackBerry and RIM families of related marks, images and symbols are the exclusive properties of Research In Motion Limited. RIM, Research In Motion, 'Always On, Always Connected', the "envelope in motion" symbol BlackBerry and BlackBerry Enterprise Server are registered with the U.S. Patent and Trademark Office and may be pending or registered in other countries.

The Bluetooth word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by Research In Motion Limited is under license. IBM, Lotus Notes, Lotus, Domino, and iNotes are registered trademarks of International Business Machines Corporation in the United States and/or other countries. Intel is a registered trademark of Intel Corporation or its subsidiaries in the United States and other countries. JavaScript is a trademark of Sun Microsystems Inc. in the United States and other countries. Mac OS is a trademark of Apple Computer Inc. registered in the United States and other countries. Microsoft, Windows, Windows NT and Outlook are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Netscape is a registered trademark of Netscape Communication Corporation. Novell and GroupWise are registered trademarks of Novell Inc. in the United States and other countries. All other brands, product names, company names, trademarks, and service marks are the properties of their respective owners.

The BlackBerry device and/or associated software are protected by copyright, international treaties and various patents, including one or more of the following U.S. patents: 6,278,442; 6,271,605; 6,219,694; 6,075,470; 6,073,318; D445,428; D433,460; D416,256. Other patents are registered or pending in various countries around the world. Visit www.rim.com/patents.shtml for a current list of RIM [as hereinafter defined] patents.

This document is provided "as is" and Research In Motion Limited and its affiliated companies ("RIM") assume no responsibility for any typographical, technical or other inaccuracies in this document. RIM reserves the right to periodically change information that is contained in this document; however, RIM makes no commitment to provide any such changes, updates, enhancements or other additions to this document to you in a timely manner or at all. RIM MAKES NO REPRESENTATIONS, WARRANTIES, CONDITIONS OR COVENANTS, EITHER EXPRESS OR IMPLIED (INCLUDING WITHOUT LIMITATION, ANY EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS OF FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, MERCHANTABILITY, DURABILITY, TITLE, OR RELATED TO THE PERFORMANCE OR NON-PERFORMANCE OF ANY SOFTWARE REFERENCED HEREIN OR PERFORMANCE OF ANY SERVICES REFERENCED HEREIN). IN CONNECTION WITH YOUR USE OF THIS DOCUMENTATION, NEITHER RIM NOR ITS RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES OR CONSULTANTS SHALL BE LIABLE TO YOU FOR ANY DAMAGES WHATSOEVER BE THEY DIRECT, ECONOMIC, COMMERCIAL, SPECIAL, CONSEQUENTIAL, INCIDENTAL, EXEMPLARY OR INDIRECT DAMAGES, EVEN IF RIM HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, INCLUDING WITHOUT LIMITATION, LOSS OF BUSINESS REVENUE OR EARNINGS, LOST DATA, DAMAGES CAUSED BY DELAYS, LOST PROFITS, OR A FAILURE TO REALIZE EXPECTED SAVINGS.

This document might contain references to third party sources of information, hardware or software, products or services and/or third party web sites (collectively the "Third-Party Information"). RIM does not control, and is not responsible for, any Third-Party Information, including, without limitation the content, accuracy, copyright compliance, compatibility, performance, trustworthiness, legality, decency, links, or any other aspect of Third-Party Information. The inclusion of Third-Party Information in this document does not imply endorsement by RIM of the Third Party Information or the third party in any way. Installation and use of Third Party Information with RIM's products and services may require one or more patent, trademark or copyright licenses in order to avoid infringement of the intellectual property rights of others. Any dealings with Third Party Information, including, without limitation, compliance with applicable licenses and terms and conditions, are solely between you and the third party. You are solely responsible for determining whether such third party licenses are required and are responsible for acquiring any such licenses relating to Third Party Information. To the extent that such intellectual property licenses may be required, RIM expressly recommends that you do not install or use Third Party Information until all such applicable licenses have been acquired by you or on your behalf. Your use of Third Party Information shall be governed by and subject to you agreeing to the terms of the Third Party Information licenses. Any Third Party Information that is provided with RIM's products and services is provided "as is". RIM makes no representation, warranty or guarantee whatsoever in relation to the Third Party Information and RIM assumes no liability whatsoever in relation to the Third Party Information even if RIM has been advised of the possibility of such damages or can anticipate such damages.

Check with your service provider for availability, roaming arrangements, service plans and features.

Certain features outlined in this document require a minimum version of BlackBerry Enterprise Server Software, BlackBerry Desktop Software, and/or BlackBerry Device Software and may require additional development or third-party products and/or services for access to corporate applications

BlackBerry 8700g™
Model number: RAT42GW

Published in XXXXXX
PRINTSPEC-005

Where can I find more information?

User guide

The user guide is only a few clicks away on your BlackBerry device! To learn more about how to use your device, click **Help**.

In the menu on your device, click **Help** to see the help topics for the program that you are using.

Additional resources

If you use the BlackBerry Internet Email, log in to the BlackBerry Internet Email web site using a computer. Click **Help** to view the *BlackBerry Internet Service Online Help*.

If you use the BlackBerry Desktop Software, on the menu bar, click **Help** to find the *BlackBerry Desktop Software Online Help* and the *BlackBerry User Guide*.